

Indirect Stationary Heaters for Workshops and Industrial Plants

ready for immediate use



Wilms

What actually happens in your company if it suddenly becomes cold?

Whether factory, salesroom or warehouse: Unexpected cold weather can have unpleasant consequences. When the first frost arrives a heat source is required which is ready for use without expensive installation: Wilms stationary heaters.

Which one of the Wilms heaters is the right one for you, you can easily determine on your own according to this general rule:

$$\text{Room volume in m}^3 \times 50 \text{ kcal/h} = \text{required energy}$$

This general rule refers to normally isolated rooms. With often opened gates, for example in car workshops, this energy requirement has to be increased by appr. 20 %.

Specifications	WLE 40	WLE 75
Order No.	1260040	1260075
Heat capacity BTU appr.	120.000	200.000
kW	35	70
kcal/h	30.000	60.000
Air volume m ³ /h	2.600	5.200
Oil consumption kg/h	3,0	5,9
Voltage	230 V – 50 Hz	230 V – 50 Hz
Dimensions LxWxH mm	1200 x 500 x 1700	1380 x 585 x 1950
Weight kg	138	210
Exhaust Ø mm	150	150
Room thermostat	standard	standard
Adjustable heat outlet	standard	standard

This is Wilms quality: 2 years warranty on the heater

Wilms stationary heaters are of course standard equipped with oil burner, oil filter, fuel intake and return line as well as thermostat. The air outlet with movable ribs is 360° rotatable. This all at a very competitive price.




Perfection is our aim.

All you need:


Wilms heater, fuel, a 240 V socket and a suitable chimney

Simply set-up Wilms heater or lay it on a console (optional). Connect to chimney. Put fuel lines into a canister, a barrel or in the Wilms fuel tank (optional).

Connect heater with a 240 V socket, switch it on and immediately start heating. If you don't have the required exhaust pipes, simply order them with the heater.

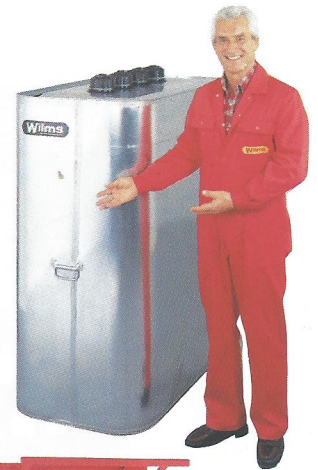

Accessories	Order No.
Double walled tank 990 l	6163940
Console for WLE 40	6904085
WLE 75	6904086
Exhaust pipe 1,0 m	6904061
0,5 m	6904075
Bow 45°	6904064
90°	6904065
Rain cover	6904067
Soot collector with cleaning flap	6904080
Clamp for wall mounting	6904081

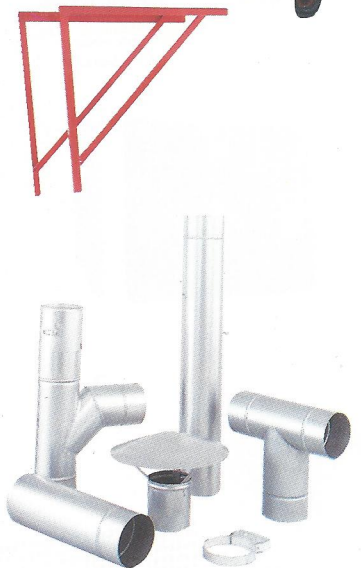

Wilms

Your local agent:

Wilms UK Limited

Phone +44 (0)1473 785911 · Fax: +44 (0)1473 785921

Internet: www.wilms.co.uk · sales@wilms.co.uk

UNIT 14 MJS YARD · ASHBOCKING ROAD
HENLEY · IPSWICH SUFFOLK ENGLAND IP6 0SA